



CLASS A AS/NZS 4233.1
PRESSURE CLEANER
NO RTO CERTIFICATION REQUIRED FOR OPERATORS

JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

selmac
MILDURA

RAPTOR™

4060 psi • 15 l/pm



Petrol Driven



Cold Water



Weekly Usage

FIELDS OF APPLICATION

Agricultural Equipment
Car and Equipment Yards
Concrete and Landscaping
Motocross Bike Wash-down
Household and Path Cleaning



JETWAVE
POWERED BY
HONDA



The Jetwave® Raptor™ revolutionises the single cylinder petrol driven cold water high pressure cleaner powered by HONDA™. Australian engineered and assembled using only the best quality Italian and global components. Its innovation provides users with a compact powerful, safe and easy to use unit that encompasses stainless steel exoskeleton (PEXO™) cover protection, and centralised control.



HERO INNOVATIONS



Ergonomic

Telescopic soft grip handle for comfort and compactness.



Stainless Steel Exoskeleton (PEXO™)

Protective formed CNC cover to safeguard all components and for increased safety.



Centralised Control

Easily accessible one panel fascia mounted control(s) & components.



AVPS™

Anti-vibration protection system (AVPS™) for quieter & reliable performance.



Oversized Puncture Proof Wheels

Innovative anti-corrosion nylon bearings and puncture proof tyres.

STANDOUT FEATURES



Professional JW AR triplex pump delivers performance and longer life.



Pull start HONDA™ GX390 Industrial Series OHV Engine.



Dual M22 screw hose coupling system.



Brass DIY washable / viewable inlet water filter.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass and over pressurisation.



0-30° variable spray patterns hi-lo (soap) nozzle.



Integrated accessory storage for hose, gun and lance.

selmac

MILDURA

Selmac Mildura

2160 Fifteenth Street, Irymple
VIC 3498

+61 3 5024 6005

admin@selmacmildura.com.au

www.selmacmildura.com.au

STANDARD EQUIPMENT



Spray Gun - J5000™ heavy duty insulated back part lance and quick coupling.

Lance / Nozzle - Lance with variable spray control complete with nozzle.

Hose - 15m of 3/8" double wire braided hose with quick coupling.

OPTIONAL ACCESSORIES


Accessory	p/n	Included
High Pressure Swivel		Included
Additional High Pressure Hose (per metre)	p/n	52001
Complete Turbo Head with Lance	p/n	JWA160.04
JWA12 Foaming Lance with Tank	p/n	JWA221-LS12
OEM Hose Reel (30m Capacity)	p/n	1060CMPL
Hammerhead™ FSC 21" ABS Plastic	p/n	JWA-FSC21.04
Hammerhead™ FSC 21" Stainless Steel	p/n	JWA-FSC22.04
Giraffe™ Alloy Telescopic Lance	p/n	JWA-TELE7.3.04
Sandblasting Kit	p/n	JWA164.04
Sludge Kit	p/n	80005.04
Drain Cleaning Hose	p/n	HOP2X15VF
Professional Drain Cleaning Kit	p/n	JWA-PDCK
Vulcan V1 Hot Box	p/n	10199

MACHINE OPTIONALS

Optional	p/n	Included
2 Wheel Trolley Kit, Top Lift Point	p/n	Included
Engine Hour Meter	p/n	TOL8075

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

V2.0 05/2020

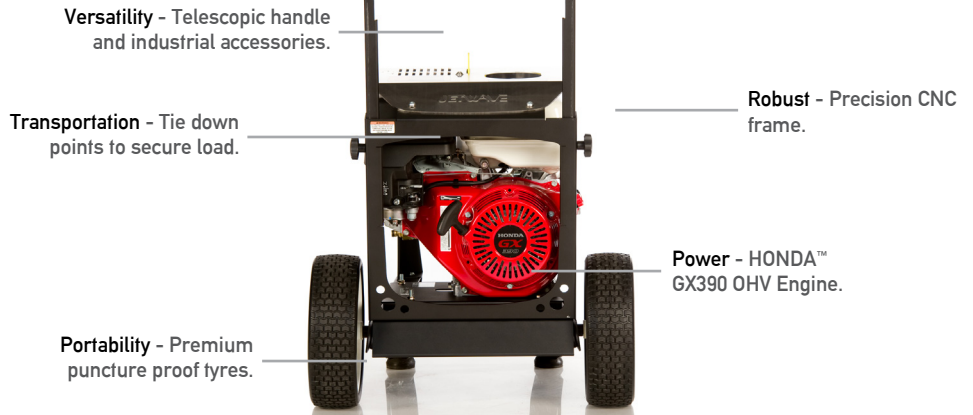

Product Code	p/n	CW4000-15P
--------------	-----	------------

TECHNICAL DATA

Parameter	Unit	Value
Working Pressure	psi / bar	4060 / 280
Flow Rate	l/pm	15
Max Water Inlet Temp	°c / °f	60 / 140
Class (AS/NZS 4233.1:2013)	grade	A (4,200 BAR/LITRES)

INTENDED APPLICATION

Usage Frequency	hours / type	1 - 2 Daily / Weekly Usage
Category of Dirt / Debris	type	Medium

MOTOR FEATURES

Feature	type	Value
Engine	type	HONDA™ GX390 (4 stroke, air cooled)
Power	hp/cc	13 / 390
Fuel Supply	type	Unleaded
Fuel Capacity	litres	6.1
Low Oil Shutdown	y/n	Y
Starting System	type	Recoil / Pull

HYDRAULIC FEATURES

Feature	type	Value
Pump / Head / Pistons	type	JW AR Plunger Triplex / Brass (nickel plated) / Ceramic
Motor Pump Coupling	type	Direct Drive
Pump Speed	rpm	3400
Unloader Valve	type	Brass: Bolt on Banjo
Safety Valve	y/n	Y
Orifice / Nozzle	size	04

OTHER FEATURES

Feature	y/n	Value
Adjustable Pressure	y/n	Y
Hose Reel Provision	y/n	Y / 1 Position
Frame Structure	type	CNC Modular skid with heavy gauge galvanised steel chassis and stainless steel cover
Onboard Accessory Storage	y/n	Y
Detergent Injector	y/n	Y - Downstream low pressure

DIMENSIONS & WEIGHT

Parameter	Unit	Value
Approx Weight	kg	75 unit / 81 boxed
Unit Dimensions	mm	1110(L) x 700(W) x 860(H)
Boxed Dimensions	mm	970(L) x 600(W) x 670(H)
Number per Pallet	type: pieces	Euro: 1

WARRANTY(S)

Warranty Type	year(s)	Value
Motor Warranty*	year(s)	3
Pump Warranty*	year(s)	2

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).